# **Between-Series Adapters**


# SMA to BMA

#### SMA Male Plug to BMA Female Jack

#### **Model Number**


#### ADT-2768-SM-BMF-02

SPECIFICATIONS Frequency: DC - 18.0 GHz VSWR: 1.05 + .005 f (GHz) Impedance: 50 Ohms Finish: Passivated Stainless Steel






### SMA Bulkhead Female Jack to BMA Female Jack

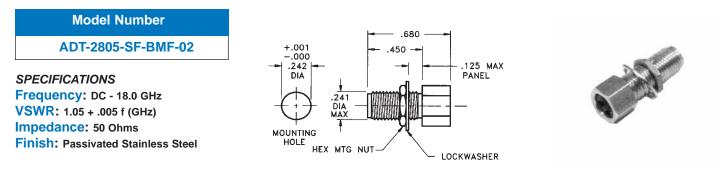

#### SMA Female Jack to BMA Female Jack - Bulkhead Mount

## Model Number ADT-2806-SF-BMF-02 SPECIFICATIONS Frequency: DC - 18.0 GHz VSWR: 1.05 + .005 f (GHz)

Impedance: 50 Ohms Finish: Passivated Stainless Steel





# SMA Male Plug to BMA Female Jack - Bulkhead Mount

#### Model Number

#### ADT-2807-SM-BMF-02

SPECIFICATIONS Frequency: DC - 18.0 GHz VSWR: 1.05 + .005 f (GHz) Impedance: 50 Ohms Finish: Passivated Stainless Steel

