

Ratings

Voltage: 300 V
 Temperature: 80 °C
 Flammability: VW-1, FT1

Conductor

Conductor count: 10
 Gauge: 28 AWG, 0.089 mm²
 Material: tinned copper strands
 Stranding: $\phi 0.127 \times 7$
 Resistance at 20 °C: 240 ohm/km maximum

Insulator

Material: SRPVC, 80 °C
 Color: black, white, red, yellow, blue, green, orange, purple, gray, brown
 Outer diameter: $\phi 0.95 \pm 0.10$ mm
 Thickness: 0.23 mm minimum average
 Style: UL 1061

Outer jacket

Material: PVC, 80 °C
 Color: black
 Diameter: $\phi 5 \pm 0.30$ mm
 Thickness: 0.76 mm minimum average



Wire marking: E339579 UL AWM STYLE 2464 28AWG 80°C 300V VW-1 - - - cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Flexibility: no observed cracking
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking
 Dielectric: 2500 Vac for 1 minute without breakdown

Use:

Internal wiring or external interconnection of electronic equipment

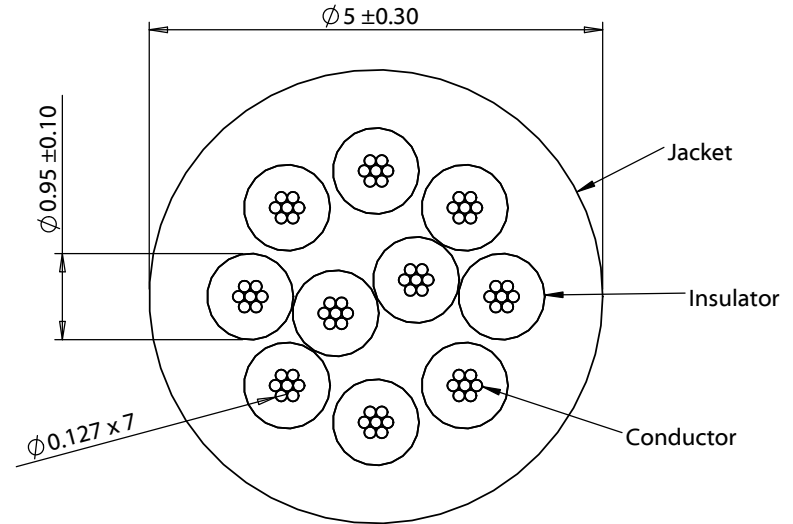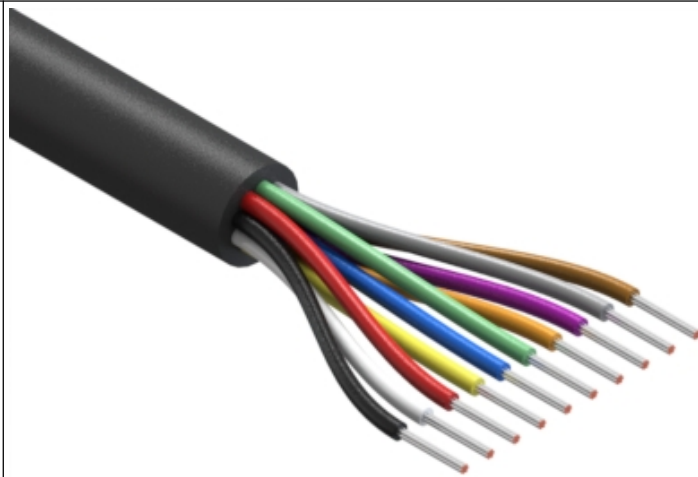

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	10/13/2015	Initial release		RoHS and REACH compliant			
A1	1/26/2016	Updated dimensions	VERIFIED:	Function test: no open, no short circuit, no intermittent	SIZE	PART NUMBER	
				Meets UL appliance wiring standard 758	A	30-00534	
			DIMENSIONS ARE IN MILLIMETERS	DESCRIPTION: Wire, 10C TS, 28 AWG, UL2464, 300V, 80C, 5.0 mm, VW-1, PVC	SCALE: 1:1		SHEET 1 OF 1
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm				