


Max. Temperature : 260° during 10 seconds

							Dot.	Name	<p>All Dim. in mm Orig. Size DIN A 4</p>	D-SUB SMT Low Profile Female 9p with die casted grounds and 4-40 UNC screwlocks	Maßstab/ Scale	
							Detail.	13Jul2007			ED	1,5:1
							Insp.					
09551563617.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors) see page 2/2	EC01215	14Jan2010	ED	HARTING EURL F-95972 Paris		TB 09 55 156 x617	Blatt/ Page 1 / 2	
09551566617.741	2				34884	18Feb2008	LP					
09551567617.741	3				34379	13Jul2007	ED					
Part number	PL	Thread	Index designation	Mod.	Dot.	Name			Sub.			

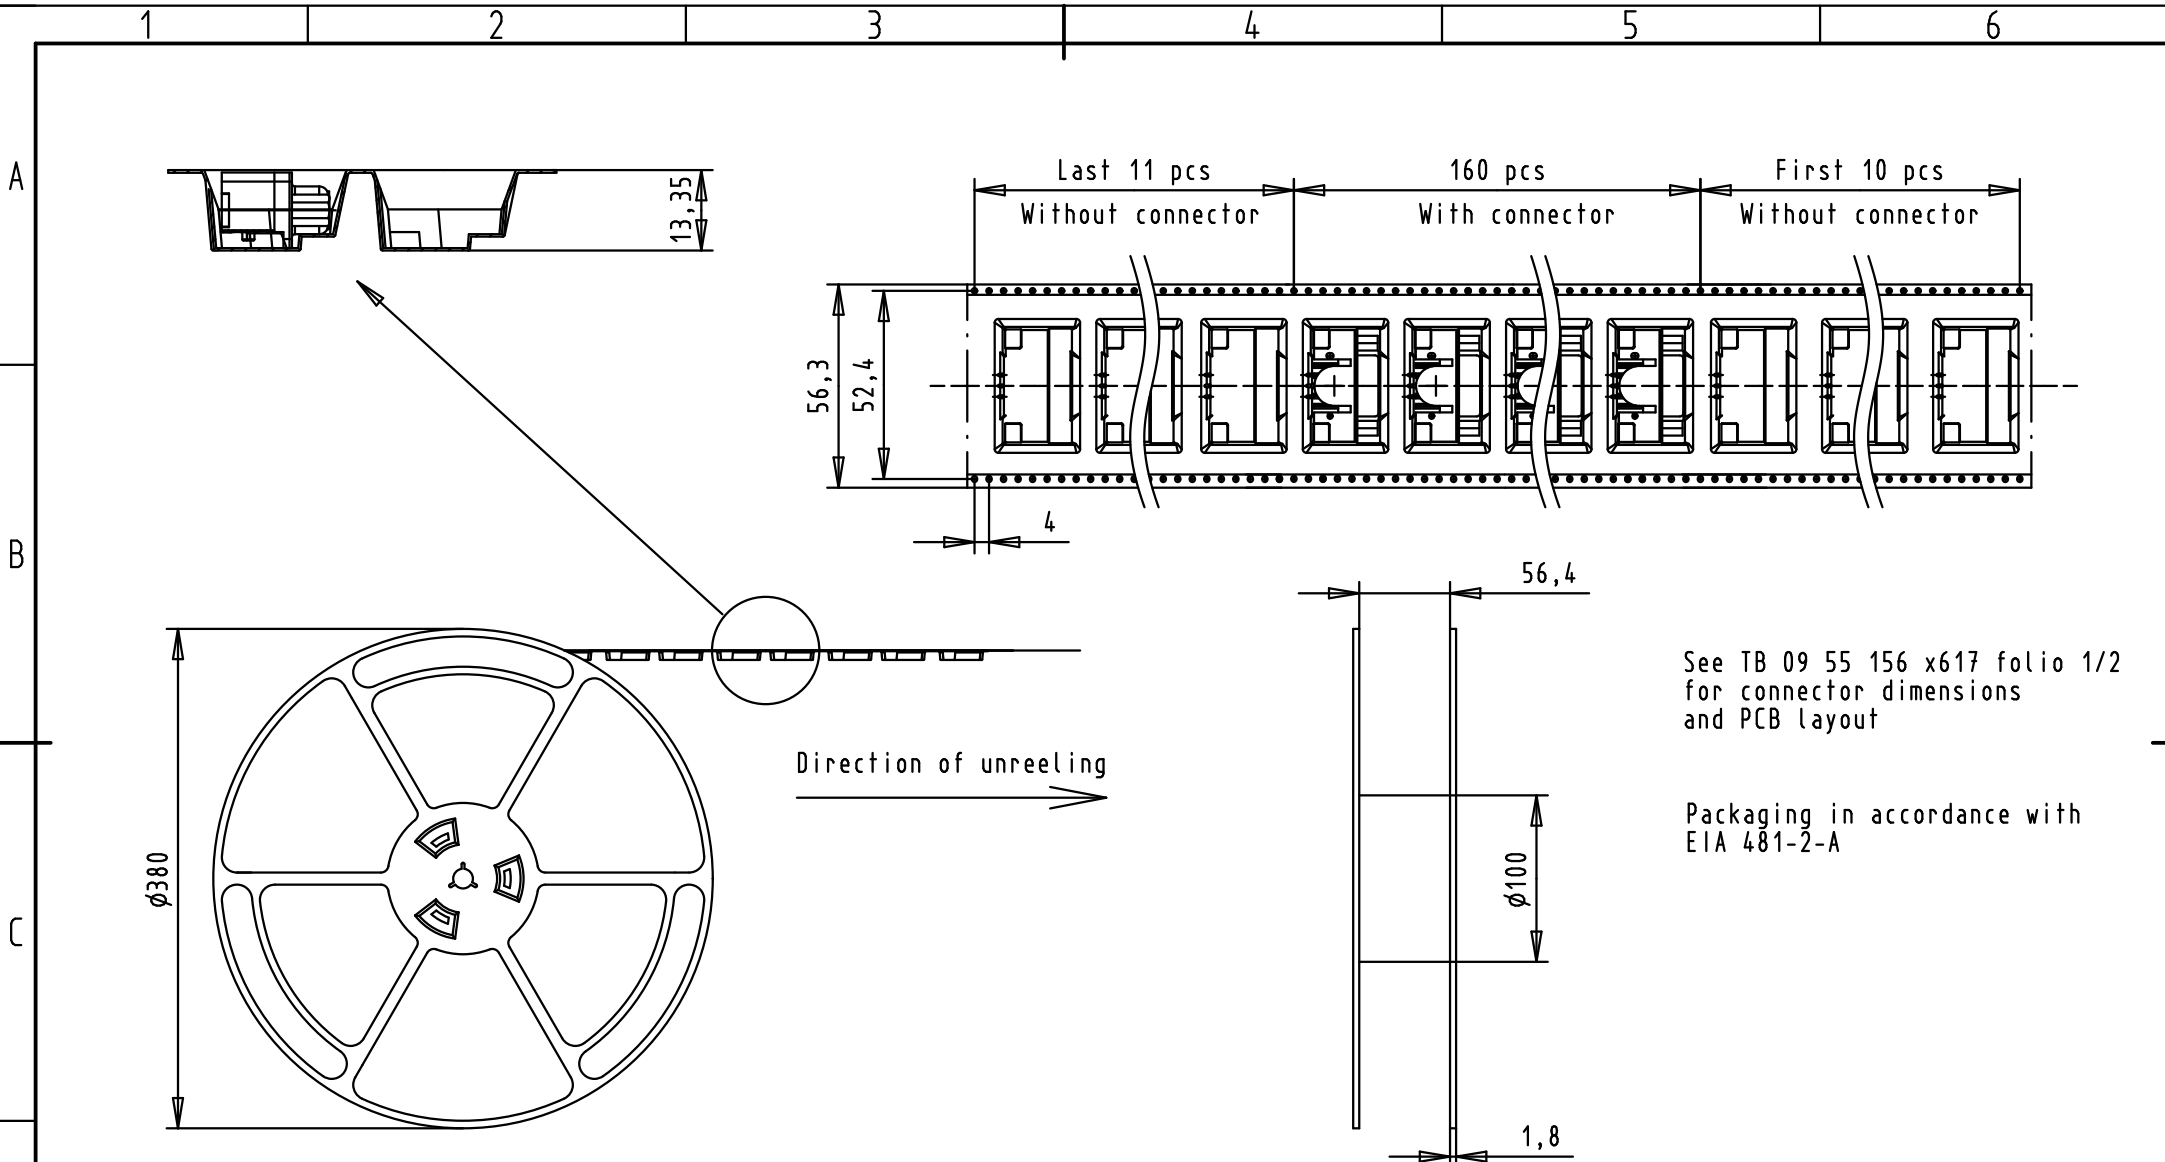

See TB 09 55 156 x617 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09551563617.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors)
09551566617.741	2			
09551567617.741	3			
Part number	PL	Thread	Index designation	

				Dot.	Name	
				Detail.	13Jul2007	ED
EC01215	14Jan2010	ED	Insp.			
EC01118	26Nov2009	LP	Stand.			
34407	31Aug2007	ED				
34379	13Jul2007	ED				
Mod.	Dot.	Name	HARTING EURL F-95972 Paris			

All Dim. in mm
Orig. Size DIN A 4

D-SUB SMT
Low Profile Female 9p
with die casted grounds
and 4-40 UNC screwlocks

TB 09 55 156 x617

Sub.